

8-FT MUDROOM UNIT



Two 4x8 plywood backs · 94.2" tall · ply to the floor

12 pcs 2x8x8 + 7 pcs 1x2 + 1 pc 1x4 + 2 sheets 4x8 ply

OVERALL

96 L x 14-1/2 D x 94.2 H

1" seat overhang · flush at wall
Hang 60" · 16" cubbies · ply to floor

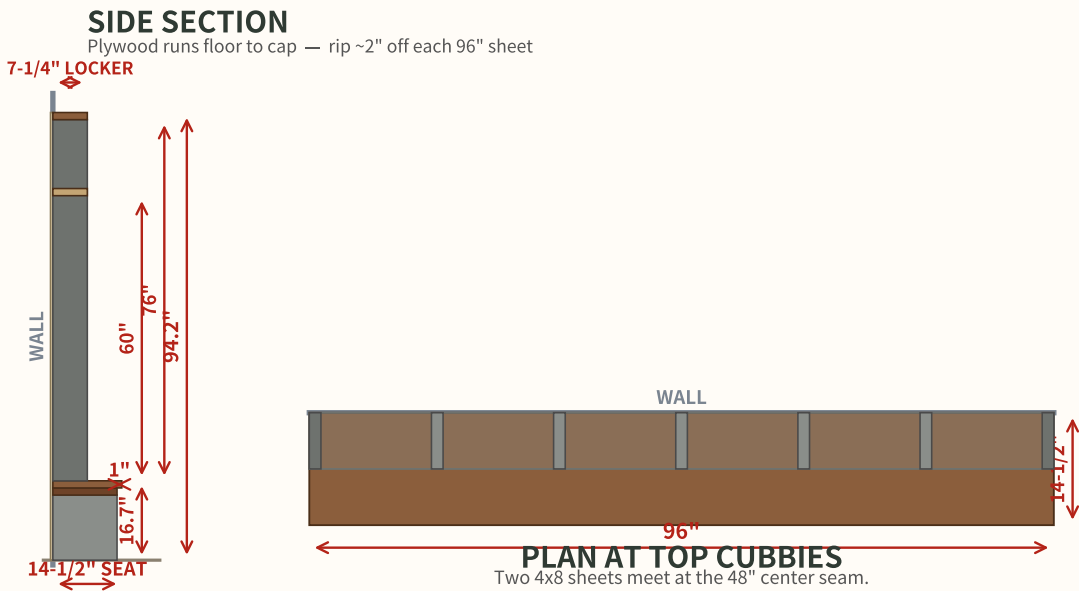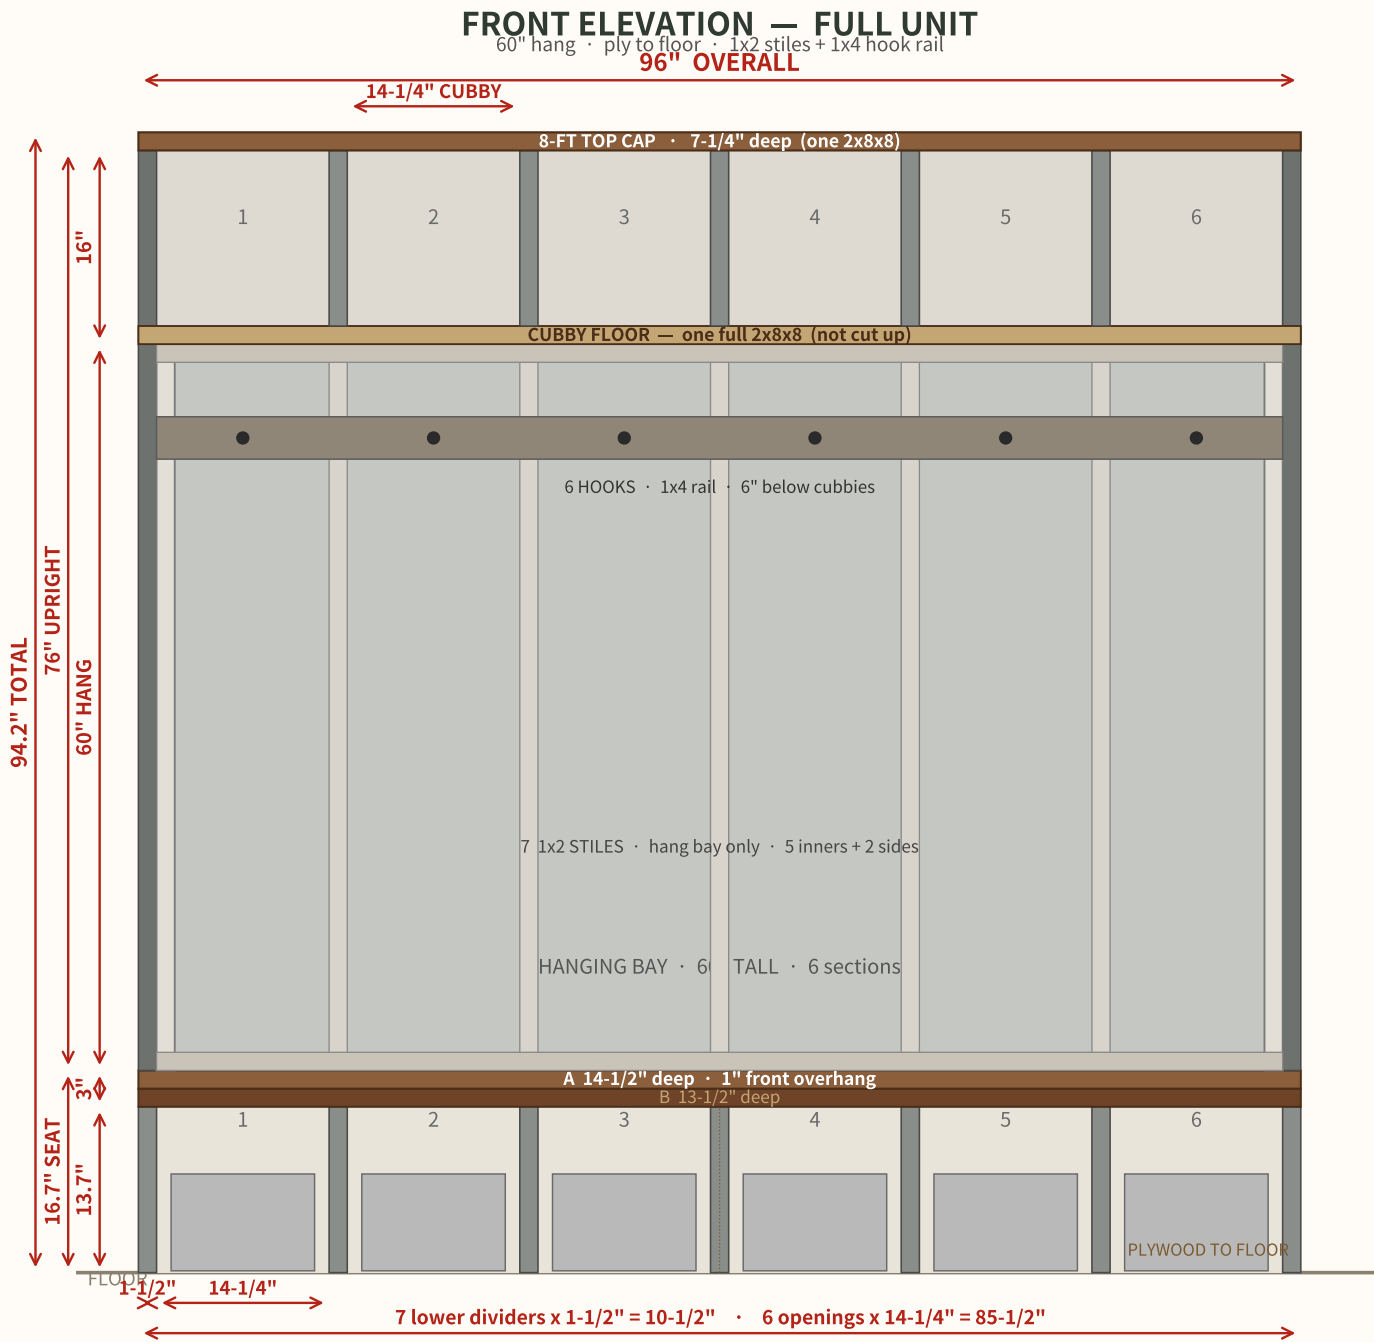

MATERIALS + PRICES

QTY	ITEM	PRICE	LINE
12	2x8 boards (8 ft)	\$8 each	\$96
2	4x8 plywood sheets	\$30 each	\$60
1	Can of paint	\$24	\$24
2	Bottles of caulk	\$5 each	\$10
7	1x2 trim boards	\$40 for 7	\$40
1	1x4 trim board (hook rail)	\$10	\$10
—	Coat hooks	\$25	\$25
—	Nails, screws, wood glue	15–25	15–25

PRICED MATERIALS
Hardware range not in the \$265 · add \$15–\$25 for nails / screws / glue

\$265

CUT NOTES

Plywood now runs FLOOR TO CAP. Two 4x8 sheets stand on end (48" wide each), seam at 48".
Unit is 94.2" tall, so rip about 2" off the 96" edge of each sheet. Lag ply into studs.
Hang 60". Seat 16.7". Top cubbies 16". Seven 1x2 stiles in the hang bay only (5 inners + 2 sides).
Hook rail is the 1x4, 6" below the cubby floor. Six hooks centered in the six bays.
12 2x8x8 · 7 1x2 · 1 1x4 · 2 sheets ply · paint, caulk, hooks, fasteners.